



Assembly Instructions

AM/Pro-Series Tractor Seat Bracket # 3001--0212




Tools Required

- 14mm wrench or socket
- 15mm wrench or socket

APPLIES TO: AM-12, AM-16, Pro-Series 1416 and Pro-Series 1420

1) Unscrew the thumb nut from the quick release, remove the quick release.

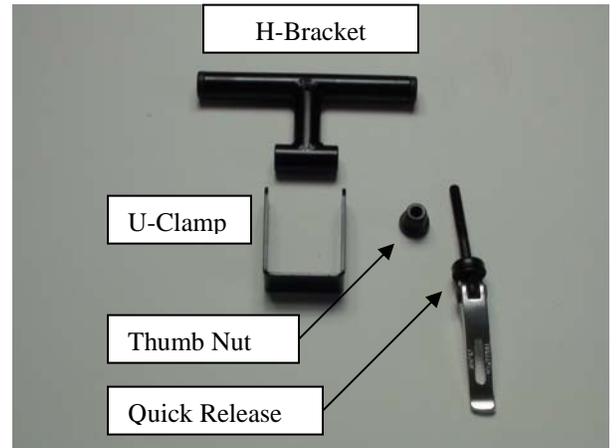

2) Place the tractor seat on a flat surface so that the underside is exposed.



3) Remove one of the nuts that secure the clamp to the bottom of the seat and remove the clamp.



4) Slide one of the long ends of the H-bracket into the clamp on the bottom of the seat.



5) Slide the clamp that you removed over the other long end of the H-bracket, place clamp over threaded stud of tractor seat, re-install the nut by turning clockwise.



6) Place tractor seat on seat post.



- 7) Slide U-clamp of tractor seat bracket over seat post, Insert quick release shaft through U-bracket and then through H-bracket until it threaded portion is visible on other side, install thumb nut by turning clockwise, lock cam lever in place.



- 8) Tighten tractor seat bracket to seat post using a 15mm wrench or socket, tighten tractor seat clamps to bracket using a 14mm wrench or socket.